

Pool Pumps
High Flow Pump
BGP-HSPU Series




BGP-HSPU series pumps are designed for the market who likes to use American pump with high flow and high lift. The overall size is reference to the market habit.

Features:

- Inlet and outlet be reinforced by a stainless-steel ring.
- Integral structure handle, convenient installation.
- Thermal protector: single phase.
- Insulation: F.
- Protection: IP55.
- Max suction: 3m.
- Liquid temperature: 5-50°C.
- Ambient temperature: up to 50°C.
- Single phase: 220V/60Hz.
- 220V/50Hz, 380V/50Hz are available on request.



Self-Priming Pump

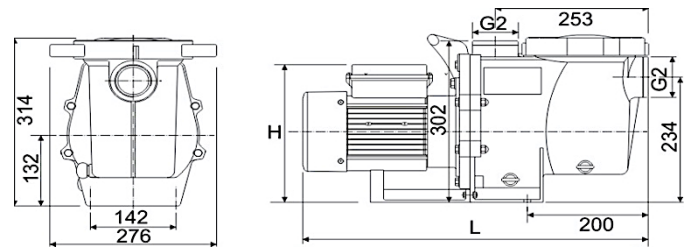

Curve:

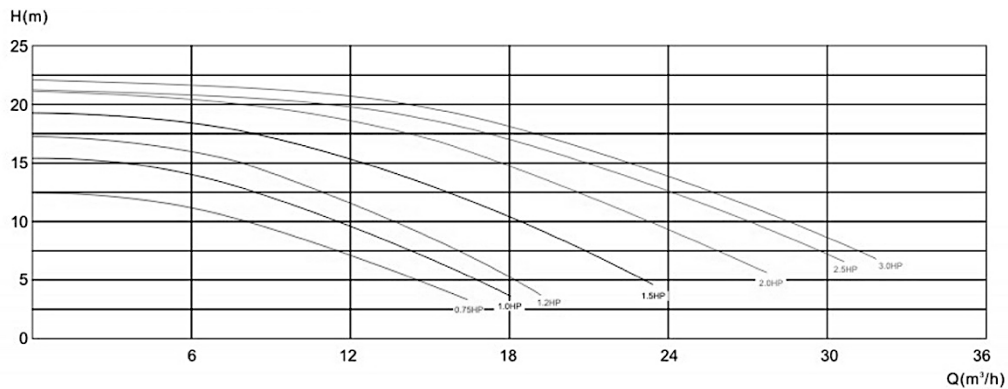


Chart:

Model	Horsepower (HP)	Rated Power (KW)	Phase	Voltage (V)	Amps (A)	Connection size	L Length (mm)	H Length (mm)
BGP-HSPU075	0.75	0.55	1	220	3.2	60.3mm or 63mm	572	243
BGP-HSPU100	1.0	0.75	1	220	3.8	60.3mm or 63mm	572	243
BGP-HSPU120	1.2	0.9	1	220	4.6	60.3mm or 63mm	572	243
BGP-HSPU150	1.5	1.1	1	220	5.4	60.3mm or 63mm	572	243
BGP-HSPU200	2.0	1.5	1	220	7.0	60.3mm or 63mm	572	243
BGP-HSPU250	2.5	1.85	1	220	8.6	60.3mm or 63mm	572	248
BGP-HSPU300	3.0	2.2	1	220	10	60.3mm or 63mm	585	258